


PEGASUS+VHZ+CNC

OPTIONAL

- NB1 BOX

STANDARD

- VAT
- C1000



PRP




MV-PEG




ST




RPM2

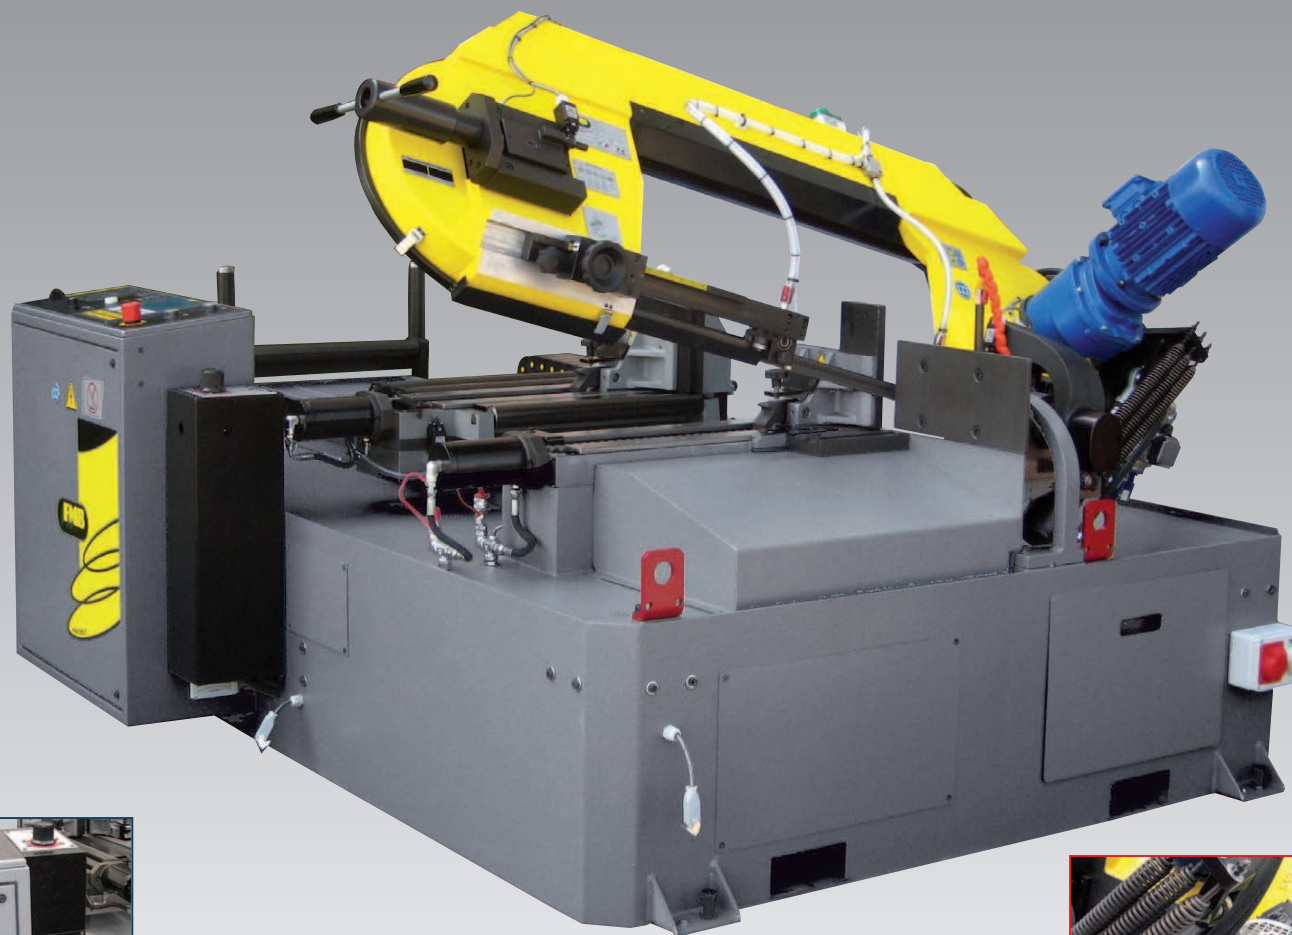

NB1



0°				MV-PEG				45°				60°				
•	a	b	a	•	a	b	a	•	a	b	a	•	a	b	a	b
Ø mm	axb mm	axb mm	axb mm	Ø mm	axb mm	axb mm	axb mm	Ø mm	axb mm	axb mm	axb mm	Ø mm	axb mm	axb mm	axb mm	axb mm
320	320	320	200	320	260	260	-	230	160	160	-	320	260	260	260	260
x 320	x 410*	x 480	x 480	x 260	x 340	x 340	-	x 160	x 160	x 230	-	x 260	x 340	x 340	x 340	x 340



Caratteristiche tecniche - Technical data - Caractéristiques techniques										
mm	m/1'	HP/kw	HP/kw	HP/kw	HP/kw	mm	Kg	a x b x c m	h±10 mm	
4120x34x1,1	16-120	4,1 3	0,08 0,06	1,5 1,1	0,17 0,13	350	2170	4,6x2,45x1,5	750	

* Fino a 500 mm per tagli in ciclo semiautomatico • Up to 500 mm for cuttings in semiautomatic cycle • Jusque 500 mm pour coupes en cycle semiautomatique